



The NL-M1410 is a 14-inch B&W monitor that provides clear, high resolution images for a wide variety of CCTV applications. This monitor can be used for viewing cameras, recorded playback and will support multiplexer and quad display modes.

The NL-M1410 is designed for ease-of-installation and operation with auto terminating BNC connectors and controls mounted up-front for easy picture adjustments. This monitor is built in a rugged metal cabinet that can be used in desktop applications or rack mounted with the optional rack mount kit.

### FEATURES


- > Rugged, attractively styled cabinet
- > Convenient up-front controls
- > 700 TV lines resolution (center)
- > LED power indicator
- > Auto terminating BNC
- > Looping video input/output
- > Rack mountable (optional)
- > One year warranty

## SPECIFICATIONS > NL-M1410

### 14-Inch B&W Monitor

<b>Picture Tube (Useful screen size)</b>	14 inches diagonal, 90° deflection angle
<b>Scan System</b>	EIA standard
<b>Resolution</b>	More than 700 TV lines (center)
<b>Scanning Frequency</b>	
Horizontal:	EIA: 15.734 kHz; CCIR: 15.625 kHz
<b>Linearity:</b>	
Horizontal:	10%
Vertical:	10%
<b>Video In/Output</b>	Composite 0.5 to 2.0 Vp-p, Sync Negative
<b>Audio In/Output</b>	N/A
<b>Video Connectors</b>	BNC, auto terminating connectors
<b>Power Source</b>	120 VAC, 60 Hz
<b>Power Consumption</b>	27 Watts
<b>Operating Temperature</b>	32 to 104 °F; 0 to 40 °C (performance range)
<b>Ambient Humidity</b>	10 to 90%
<b>Weight</b>	22.05 lbs; 10 kg
<b>Dimensions (W × H × D)</b>	12 7/8 × 12 5/8 × 12 3/8 inches; 328 × 320 × 315 mm

NL-M1410

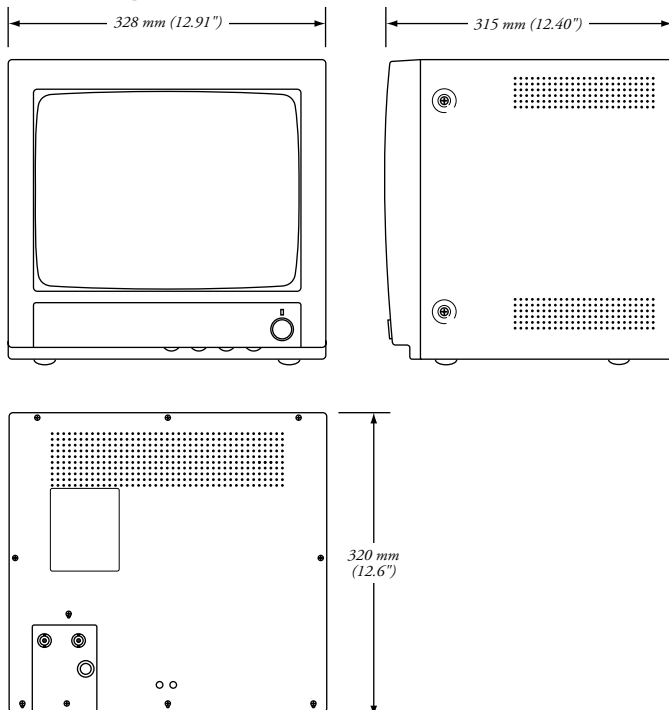

> [www.nationalcctv.com](http://www.nationalcctv.com)

*Please visit our website for more information on the entire line of National Electronics™ products.*

E.&O.E. All specifications are subject to change without notice. Information furnished is believed to be accurate and reliable. However, no responsibility or liability is assumed by its use, nor for any infringement of patents or other rights of third parties which may result from its use.